


ROOM CONTROL UNIT

UGC-H

cod. 6300-101010

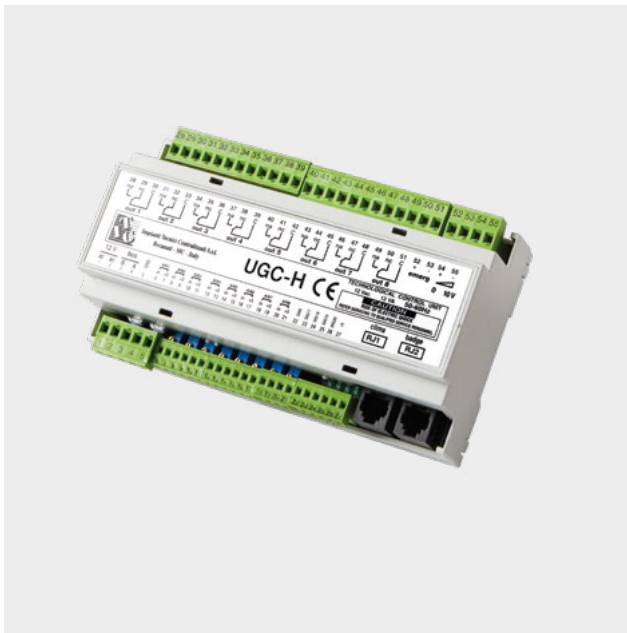

The UGC-H control unit is housed in 9-module box for DIN rail. It is provided with 8 analog and 4 digital inputs for connection of following devices:

- "ST1" temperature sensors,
- NO or NC type alarm/anomaly contacts,
- -buttons,
- bathroom pull cords for help call.

It is also provided with socket for PTF/PTR panel (max. 1) and 8 relay outputs with voltage free contacts for loads at 230Vac - 4(2)A.

Data transmission over 2-wire UTP CAT.5 bus cable in half-duplex RS 485 standard.

Reprogrammable microcontroller of flash type.

12Vac, 15VA power supply.

Dimensions: 160x100x60 mm. Weight: 0.50 kg.


SOCKET FOR LOCAL RESET

PRL

cod. 6300-141000



* Civil series > p. 97

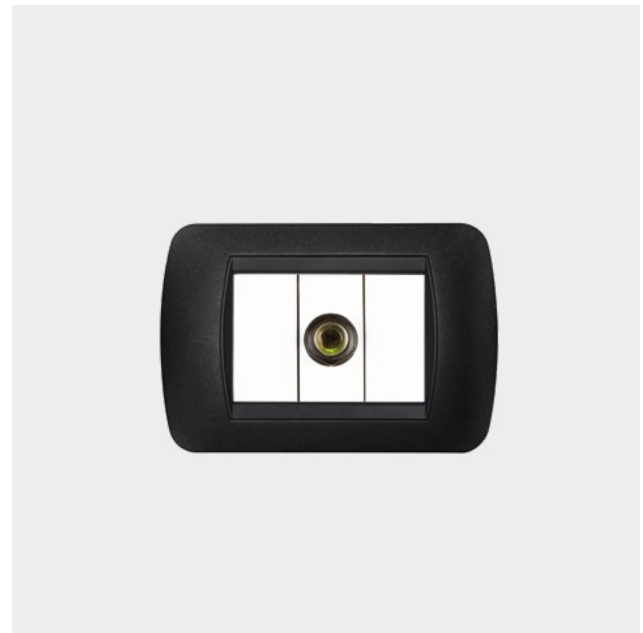

Socket for local alarm reset by means of coded jack for identification of operator with display, recording, storing and printing of events.

Weight: 0.03 kg. Depth 46mm.